

PRO-BELT™ ROUND BALER
MASTERPIECE IN THE ROUND



let's get it done.

PRO-BELT™ VARIABLE CHAMBER ROUND BALER

MASTERPIECE IN THE ROUND

The all-new New Holland, Pro-Belt™ premium round baler range delivers the performance and reliability that professionals and contractors can rely on. From the heaviest wet silage crops to bulky straw windrows, the Pro-Belt 165 and 190 deliver solid and square shouldered round bales with impressive capacity from either the renowned SuperFeed™ or new 25 knife CropCutter™ large diameter rotor feeding systems.

Durability by design Pro-Belt round balers have been proven the world over with over 150,000 bales produced. The all-new heavy-duty drivelines, a more robust frame, and the re-imaged bale chamber deliver professional grade uptime and bales with high density.

The latest precision farming solutions including ISOBUS electronics offers a simple user interface to track all baler functions and quickly adjust on-the-go, track individual bale moisture, and average bale moisture then make smart real time agronomic decisions. Completed with New Holland next generation styling the stylish side shields, flowing lines are more than good looking they are a visual representation of crop flow through the baler.



ALL-ROUND PRODUCTIVITY
High Capacity up to 30t/hour



ALL-ROUND PERFORMANCE
High Density up to 140kg/m³ in straw



ALL-ROUND VERSATILITY
Fine-chop 25 knife 'V' pattern CropCutter™ system



ALL-ROUND DURABILITY
Simplified TwinDrive™ gearbox







ALL-ROUND THROUGHPUT



EFFICIENT PICKUP

The Pro-Belt™ baler range features a five tine bar pick-up, which has a mounting angle increased 7° forward for even smoother crop flow into the baler. The pick-up also features a heavy-duty cut-out clutch for overload protection. When combined with the feed assist roller, which positively directs the crop into the SuperFeed™ or CropCutter™ rotor to maintain a constant crop flow at all times, maximizing capacity.

ULTIMATE CROP FLOW

A heavy weight formed steel roller windguard pre-compresses windrows without bunching ensuring a more positive pickup tine engagement. Crop driven it's fully adjustable to match in-field conditions and it's continual rotation delivers a smooth even crop flow over the complete pickup for unparalleled capacity.

FROM ROAD TO FIELD IN THE BLINK OF AN EYE

The castoring gauge wheels quickly transform the Pro-Belt baler from transport to field mode by simply swivelling into position. No tools. No need to remove. No hassle. What's more, when in use, they assist tight turning on the headlands and prevent productivity-impacting scrubbing.

REDUCED IN-FIELD FOOTPRINT

The Pro-Belt baler can be fitted with a range of tyres, including a 620/40-22.5 option, delivering an ultra-wide footprint for reduced compaction, which can help with regrowth for subsequent silage cuts during the season.





ALL-ROUND VERSATILITY

LARGER AND STRONG ROTOR

The large diameter, 520 mm rotor – a full 65mm larger than Roll-Belt models – delivers 'V' shaped feeding to ensure even feeding across the entire width. In line with the Pro-Belt's heavy duty status, the rotor is double the weight of that in Roll-Belt models, which means when at working speed, it smooths out heavy wedges of crop to keep the baler going.

AUTOMATIC ACTIVEDROP™ FLOOR

The automatic ActiveDrop™ floor system senses when the load in the pick-up becomes too great for the rotor, and automatically drops the floor to clear potential plugs. This ensures continuous baling, without the need to stop.



SUPERIOR AND HIGHLY EFFICIENT ROTOR FEEDING

All Pro-Belt Balers come standard with the renowned SuperFeed™ rotor. As an option a med cut 13 or short cut 25 knife CropCutter™ system is now available. Each individual knife has a paired rotor fingers per knife, guarantees a controlled cutting action and superior cutting performance. On 25 knife CropCutter™ units knife selection can be made between all 25, 12 only or 13 only. Finally an optional hard-faced knife kit is available for an extended long lifetime.







ALL-ROUND QUALITY

DESIGNED FOR BALING EFFICIENCY

New Holland is renowned the world-over for its perfectly shaped bales, and the Pro-Belt is no exception. The all-new bale formation area features a simplified design with fewer moving parts. The sledge formation rolls have been removed, and with fewer rollers and four endless belts, you can enjoy more reliable operation with less maintenance.

CORE BALE STRENGTH

The fixed rollers generate an aggressive rolling action and when combined with the belt angle, this delivers quicker, tighter core formation for denser bales. The variable chamber technology means that operations can vary the size of the bale produced in 5cm increments, from 90cm right up to 165 or 190cm to enhance baling flexibility.

INTUITIVE DENSITY CONTROL SYSTEM

The intuitive, in cab, bale density control system can cater for varying crop conditions and bale end uses requirements while on the move. Operators can adjust bale density in 10 bar increments from the cab monitor. The actual bale density is displayed on the monitor and users can set different core and outer layer densities. Lower core density is ideal for hay baled in marginal conditions which needs to breathe or will be used for feed. High density cores are ideal when extensive handling is required



POWERFUL BELT DRIVE

The twin belt drive, means that double the amount of belts are in contact with the drive which greatly improves power transfer and increase performance in any baling condition.

LATEST GENERATION BALE WRAPPING


The latest generation Duckbill system is physically closer to the bale, speeding up the entire wrapping process. Spreader rolls maintain uniform coverage across the entire bale and the net is actively placed inside the chamber, next to the bale for more accurate wrapping performance. The amount of net used is regulated by sensors and this simple, reliable system, guarantees consistent net tension and tighter wrapping.

RIGHT TO THE EDGE

The renowned EdgeWrap™ system ensures the net wrap goes to the edge of the bale, and in some cases, it forms an envelope over the bale edge protecting bales and helping them retain their overall shape. This is ideal for bales which need to be handled and transported.

DAY LONG PERFORMANCE

An additional roll of net can be stored at both the front and the side of the baler, ensuring you have enough net for an days baling in the field.

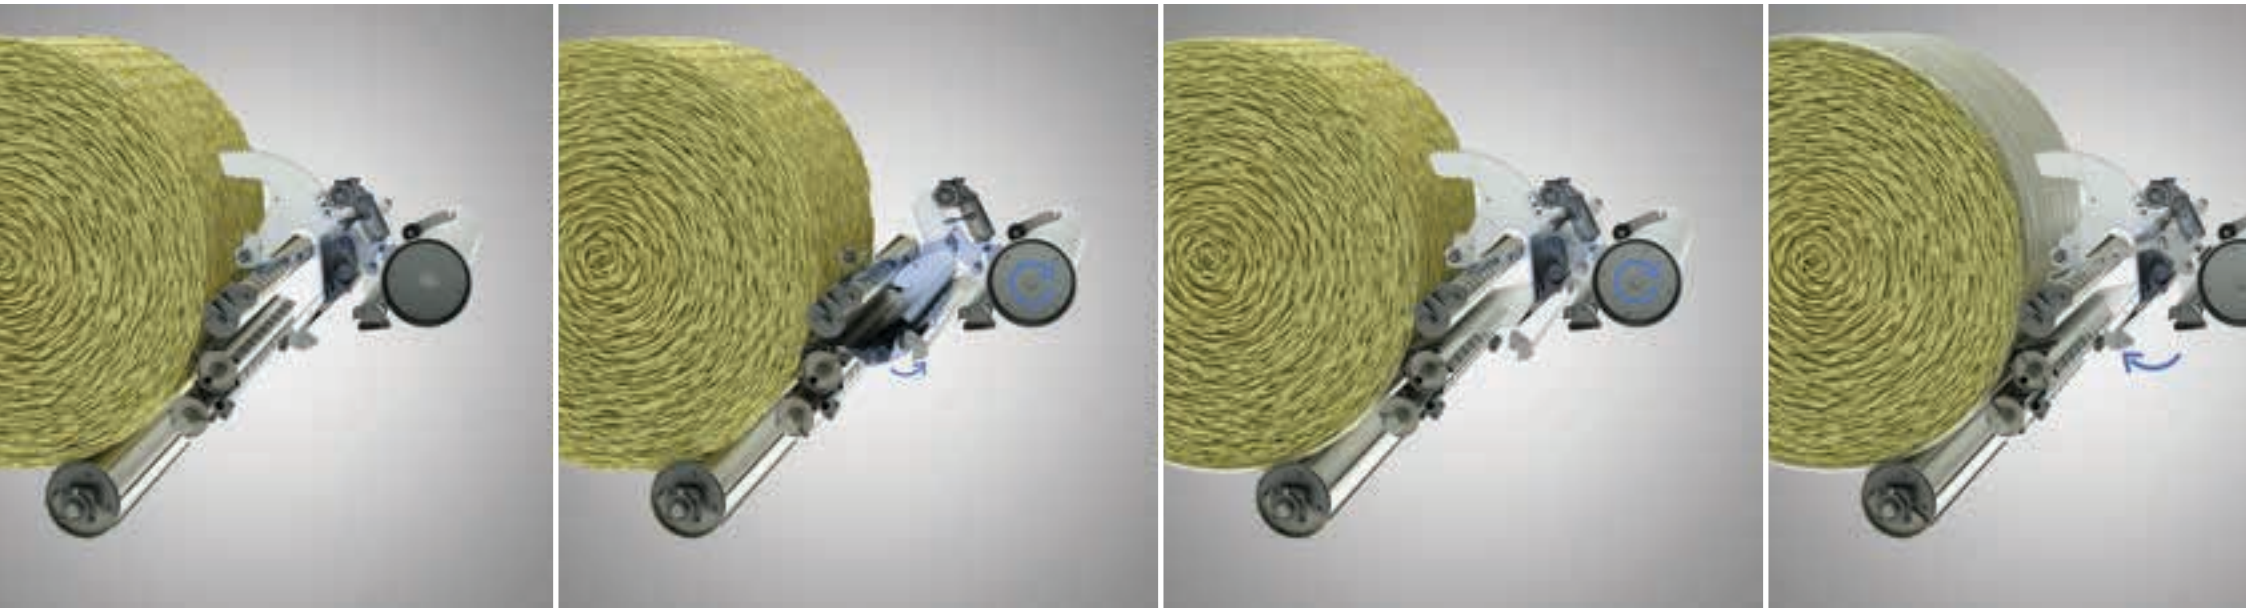



ALL-ROUND INTELLIGENCE

INTUITIVE BALER MANAGEMENT

The Pro-Belt™ baler can be specified with a choice of monitors to suit your individual needs, from the entry level ISOBUS compatibility, which comes as standard, through to the optional IntelliView™ IV colour touchscreen – which will be familiar to users of other New Holland products. Both systems use the same layout and graphics as those used by the BigBaler High Density range, which will facilitate ease of use for baling contractors.

INTELLIBALE™ TECHNOLOGY

Productivity enhancing IntelliBale™ technology means that the Pro-Belt baler can communicate with your tractor. It will bring the tractor to a halt as soon as the pre-set bale diameter has been reached, net wrap application begins automatically and the tailgate is raised. A sensor on the bale ramp tracks the complete process and closes the tailgate as soon as the bale has been ejected, a signal is then given to the operator to move forward.

REAL TIME MOISTURE MONITORING

The moisture sensing system uses two discs, situated either side of the bale chamber to detect real time bale moisture. Readings are taken every 10 milliseconds, and an averaged reading from the two sensors is sent to the cab every second, for real time data transmission. Upper and lower moisture limits can be set, if surpassed, baling can be stopped to preserve quality.

BALE FILL ASSISTANCE

Two fill sensors, located on either side of the baler continually monitoring the fill profile. The in-cab display relays this information to the operator, who can adapt their driving pattern accordingly to ensure consistent, uniform bales.



ADVANCE FLEET MANAGEMENT

MyPLM[®]Connect telematics, which can be accessed through the MyNew Holland[™] App, enables you to connect to your Pro-Belt baler from the comfort of your office through the utilization of the mobile network. You can stay in touch with your machines at all times, and can even send and receive real-time information that saves time and enhances productivity. The entry-level MyPLM[®]Connect Essential package offers the most frequently used features or upgrade to the MyPLM[®]Connect Professional package for full machine monitoring and control. In short, MyPLM[®]Connect will help you to reduce your fuel bills and improve fleet management and security in one simple package.

ACCESS TO MYPLM[®]CONNECT PORTAL THROUGH MYNEWHOLLAND[™]APP

MyNew Holland[™] provides owners and users the ability to view and manage their machinery fleets online. Users will be able to access a range of information such as operator manuals and how-to videos as well as an option to view activations and subscriptions via the live link to the VMS tool. Users can even make purchase requests direct with their dealer to activate a service or takeout a subscription. MyNew Holland[™] also provides direct access to the MyPLM[®]Connect Portal.





ALL-ROUND DURABILITY





TWINDRIVE™ GEARBOX

Uniformly spread the load for balanced and smooth operation with greater reliability the TwinDrive™ gearbox directs PTO power to the right and left of the baler without transferring power through the driven rollers.

HEAVY-DUTY DRIVES

Pro-Belt balers feature bigger heavy-duty bearings, larger sprockets and drive rolls providing a truly robust construction. Using only four heavy duty driving chains power is delivered efficiently and will provide a more durable operation.

DESIGNED WITH SERVICING IN MIND

The Pro-Belt baler has been designed with easy maintenance in mind - after all, you want to spend more time baling and less time in the yard! Efficient features such as minimal daily greasing points, standard automatic oiling system, wide opening side shields will keep routine maintenance to a minimum. Optional automatic greasing system and under-shield LED servicing lights complete the package.





ALL-ROUND SUPPORT



Complete peace of mind, our goal is to provide support services to maximize your machine's profitability and your satisfaction. We offer repair, parts and maintenance to enhance performance and provide solutions tailored to your needs.



Top Service has been created to provide the highest level of personal care all year round and it is there for everyone: from a new customer wishing to find out more about New Holland and our product offering, to our existing customers wishing to share their experiences with us. We also call our customers to check satisfaction of our service for continuous improvement.





Uptime Warranty is the New Holland Extended Warranty program under the same conditions as the Base Warranty. Maximum control over operating costs, maximum improvement of the uptime, repairs completed by authorized New Holland Dealers using New Holland genuine parts, higher re-sale value of your machine are some of the key benefits. Please ask your Dealer for more details and for a tailored Uptime Warranty offer*.

* Refer to Uptime Warranty detailed terms and conditions at your Dealer



The priority assistance service for New Holland machines. A dedicated team operates around the clock to manage the requests, which can be activated through the MyNew Holland™ app and the Top Service toll free number. New Holland and the Dealer network will do all possible to provide support, checking many options to get our customers back on the move as quickly as possible and the request will be followed up until the machine is fully repaired. The team relies on a Priority Parts process and dedicated service team, to reach a fast resolution. The service is able to solve more than 80% of breakdowns in less than 48 hours, this is our commitment to our customers!



Type		SuperFeed™	CropCutter™	SuperFeed™	CropCutter™
Bale dimensions					
Diameter Min. / Max.	(cm)		90 / 165		90 / 190
Width	(cm)		120		120
Tractor requirements					
Minimum PTO power	[kW/hp(CV)]	74/100		74/100	
PTO speed	(rpm)		1000		1000
Hydraulic remotes required			2		2
Main drive					
TwinDrive™ split gearbox					
Cut-out clutch					
Protection					
Flexible High / Low hitch adjustment		●			●
MaxiSweep™ pick-up					
Standard working width Standard / Optional	(m)		2.3		2.3
Five tine bar pick-up with rubber tines			●		●
Roller windguard			●		●
Top feed assist auger			○		○
Flotation				Double adjustable spring	
Hydraulic pick-up lift			●		●
Pick up protection				Radial pin clutch	
No tools folding pickup gauge wheels			●		●
No tools folding castoring pickup gauge wheels			○		○
Gauge wheels (15/6.00 - 6)			●		●
Feeding system					
Rotor width 520mm 'V' tine configuration					
ActiveDrop™ floor			●		●
SuperFeed™ system		●		●	
CropCutter™ system		—		—	
Knives options		—	13 / 25	—	13 / 25
Theoretical Cut Length	(mm)	—	83 / 41	—	83 / 41
Knife activation, in - out		—	Hydraulic	—	Hydraulic
Knife protection		—	Individual spring	—	Individual spring
Bale formation					
Roll-Belt™ technology (Combination of rollers and belts)					
Type					
Formation rolls			2		
Belts			Four 273mm endless		
Twin Belt drive			●		●
Bale shape indicators			●		●
Net wrapping system			Duckbill		Duckbill
Net storage net only			2 ●		2 ●
Net coverage			EdgeWrap™		EdgeWrap™
Bale density system					
Dual density system			●		●
Density control				In-cab control through monitor	
Electronic control system					
ISO 11783 connection ready			●		●
IntelliView™ IV monitor			○		○
IntelliBale™ system			○		○
Moisture measuring sensor			○		○
Electronic safety cut out			●		●
Brakes					
Hydraulic			○		○
Pneumatic			○		○
Maximum travelling speeds					
Bale ramp			●		●
Baler dimensions					
Length	(m)		4,87		5,12
Width on 500/55-20 tyres	(m)		2,74		2,74
Width on 620/40-22.5 tyres	(m)		2,91		2,91

● Standard ○ Optional — Not available



www.newholland.com/uk
www.newholland.com/ie



The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. BTS Adv. - Printed in Italy - 04/22 - (Turin) - 223000/INB